

Water Through Air using Peltier Elements

Rohan Gupta
UG Student

Department of Mechanical Engineering
Shree L.R. Tiwari College of Engineering

Jogesh Gupta
UG Student

Department of Mechanical Engineering
Shree L.R. Tiwari College of Engineering

Ajay Gupta
UG Student

Department of Mechanical Engineering
Shree L.R. Tiwari College of Engineering

Uday Mahadik
UG Student

Department of Mechanical Engineering
Shree L.R. Tiwari College of Engineering

Prof. Abhay Bendekar

Assistant Professor

Department of Mechanical Engineering
Shree L.R. Tiwari College of Engineering

Abstract

“Water usage across fast developing sub continental economies is growing at unprecedented rate which is more than twice the rate of the population growth for the past century. Although there is not yet a global water shortage, about 2.8 billion people, representing more than 40% of the world’s population, live with some form of water scarcity off which almost 1.2 billion live under conditions of physical water scarcity, which occurs when more than 75% of the river flows are withdrawn in countries like India and China. Remaining 1.6 billion people live in areas of economic water scarcity, where human, institutional, and financial capital limits access to water, even though water is available locally to meet human demands. The project is an attempt to provide drinking water to the people where there is shortage of pure and fresh drinking water so that we can overcome the problem mentioned above. The idea is to make use of the moisture present in air to produce water, because there is always certain percentage of humidity present in air even if we are in desert. Hence this would be a reliable technology. The method is to cool the air available in atmosphere which will convert the water from gaseous state i.e. from moisture into liquid. The system will work on solar energy by using solar cell hence it can be also use effectively in place where there is lack of electricity. The air to be cooled will be filtered first so we could deliver harmless water which makes our idea non-toxic and dependable. There is no need of long transmission lines since sunlight is present in almost all part of our country. Hence we can implement it at any place and this will also save the cost of transmission pipelines that we normally use for transmission of water. Hence the project aims to develop a technique of water production that can be practice by any one and at any place affordably and efficiently.

Keywords: Peltier Elements, solar energy, moisture, humidity

I. INTRODUCTION

Water is needed in all aspects of life. Difficult to purify, expensive to transport and impossible to substitute, water is an indispensable element of life. Nearly 45 crores of people in 29 countries are staying in water-deficit regions. Nearly 70 % of the fresh water is used for irrigating the agricultural fields which has raised water conflict between the urban and rural areas. If all this continues, then very soon i.e. by 2032, nearly half of the world’s population will be facing water shortage problem. It is predicted that in the 21st century there will be water wars [4]. Atmosphere contains large amount of water in the form of vapour, moisture etc. Within those amounts almost 30% of water is wasted. This amount of water can be used if we are able to extract the water that is present in air in form of moisture. The project is an attempt to make device that is capable of converting atmospheric moisture directly into usable and even drinking water.

The device uses the principle of latent heat to convert water vapour molecules into water droplets. In many countries like India, there are many places which are situated in temperate region; there are desert, rain forest areas and even flooded areas where atmospheric humidity is eminent. But resources of water are limited. In the past few years some projects have already been done to establish the concept of air condensation as well as generation of water with the help of peltier devices, such as harvesting water for young trees using Peltier plates that are powered by photovoltaic solar energy etc. So, this project will be helping to extend the applications of such devices further in the near future. According to previous knowledge, we know that the temperature required to condense water is known as dew point temperature. Here, the goal is to obtain that specific temperature practically or experimentally to condense water with the help of some electronics devices. This project consists of a thermoelectric peltier (TEC) couple, which is used to create the environment of water condensing temperature or dew point.

II. PELTIER COUPLE

The peltier thermoelectric device has two sides(a p-type and an n-type semiconductor), and when DC current flows through the device, it brings heat from one side to other, so that one side gets cooler while the opposite one gets hotter. This is called Peltier effect and electron hole theory. Peltier coolers consist of a Peltier element and a powerful heat sink/fan combination. Peltier elements come in various forms and shapes. Typically, they consist of a larger amount of thermocouples arranged in rectangular form and packaged between two thin ceramic plates. This type of device is so powerful that it can freeze good amount of the water within several minutes.

A conventional cooling system contains three fundamental parts-the evaporator, compressor and condenser. A TEC also has some analogous parts. Energy (heat) is absorbed by electrons at the cold junction, as they pass from a low energy level in the p-type semiconductor element, to a higher energy level in the n-type semiconductor element. It is the power supply that provides the energy to make those electrons to move through the system. At the hot junction, energy is expelled to a heat sink as electrons move from a high energy level element (n-type) to a lower energy level element (p-type) [5].

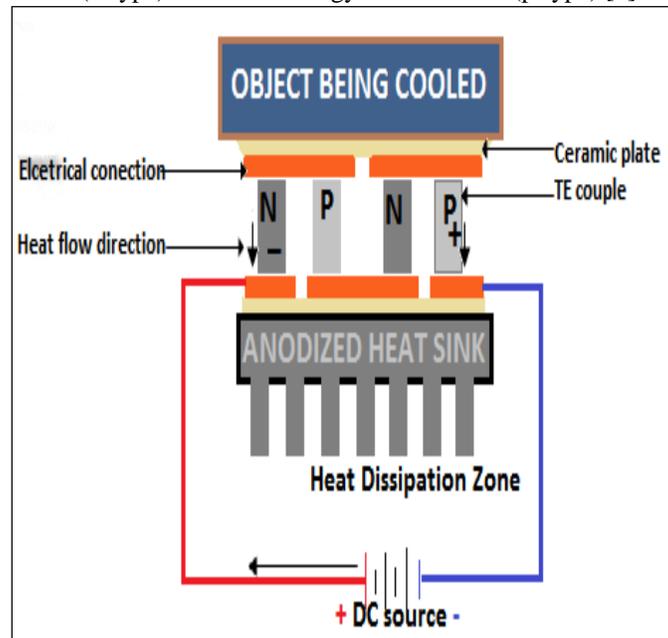


Fig. 1

III. WORKING FEATURES

Practically TE couples are combined in a module, connected electrically in series and thermally in parallel to obtain a promising output. But it will be inconvenient to use such a device that has less advantageous work done to power ratio. There are modules available in the market according to variety of sizes, shapes, operating voltages-currents and ranges of heat pumping capacity. The present trend, however, is towards a larger number of couples operating at lower currents; before choosing an efficient device, some parameters must be determined. These are:

T_c : Temperature at Cold Surface.

T_H : Temperature at Hot Surface.

This T_H incorporates two major parameters:

- 1) The efficiency of the device i.e. between the hot surface of the TEC and the ambient environment.
- 2) The temperature of ambient environment into which the heat is being rejected.

Q_c : The heat to be absorbed at the Cold Surface.

The object to be cooled is intimately confined with the cold surface of TEC, thus the temperature of that object starts falling until it is as same as the temperature of the cold surface of the TEC.

Now, ΔT can be defined as:

$$\Delta T = T_H - T_c$$

This conflict should be accurately determined if the design is to operate as desired.

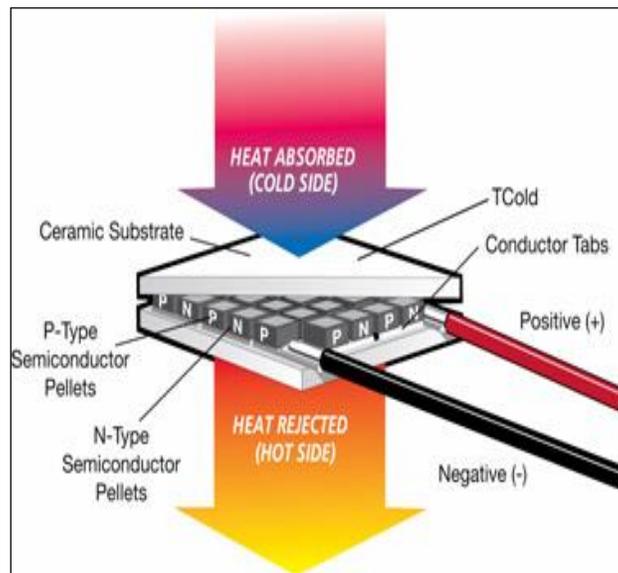


Fig 2

IV. SOLAR-DRIVEN THERMOELECTRIC

Solar energy has the excellent advantage of low water consumption during its use-phase, thus it ideal for installation in places where there is a high degradation of freshwater supply. However, utilization of solar refrigeration would have been still excluded if the energy crisis in 1970s did not affect the modern thoughts, research on Peltier's cooling effect and Photovoltaic effect also developed around that time, primarily for the cold chain project of the World Health Organization and the international Health Organizations specifically for rural areas. Solar cells were used inside small TE operated fridges. Experimental investigation and analysis on a solar cell driven thermoelectric refrigerator has been conducted. The main components of the solar battery consist of cell including the (Photo Voltaic) PV array, the storage battery and the controller. The PV array is installed at outdoors and the battery stores the excess, produced during sunshine periods. This stored energy is further used for running the system during the night hours also. The controller is mainly an electronic device, assembled with microprocessor, which can readily sense the battery condition as well as the power consumptions and controls the system operation accordingly. It has very simple architecture or circuit design. The main duty of it is to protect the battery against excessive charging or discharging. There are specially designed lead-acid batteries suitable for deep discharge cycles occurring in systems indeed this battery could be any type.

V. REQUIRED CALCULATIONS AND EQUATIONS

One of the objectives from the very first of this project is to obtain dew point temperature and control of the temperature in order to use the exact energy to condense water, a precise control of the temperature of the cold side must be performed.

The equation is :

$$T_{dp} = (Hr/100)^{1/8} \cdot (112 + 0.9T_a) + 0.1T_a - 112 \quad (2)$$

Where T_{dp} (°C) is the dew point temperature, Hr (%) is relative humidity and T_a (°C) is the temperature of the ambient air moisture that is to be condensed, i.e. the air in the cold chamber (shown in the diagram).

TEC1 is typically connected side by side and sandwiched between two ceramic plates. The cooling ability of this type of device is then proportional to the number of TEC1s in it. The amount of heat that can be absorbed is proportional to the current and time.

$$W = P \cdot I \cdot t \quad (3)$$

Here P is the Peltier Coefficient, I am the current, and t is time [12].

These two mathematical expressions will be sufficient for this prototype project to be carried on further.

VI. WORKING OF THE DEVICE

According to the previous elaboration, the objective is to calculate the dew point temperature T_{dp} from the gathered information about that ambient environment into which the device is going to run i.e. the information regarding Hr and T_a . Once the dew point temperature is obtained, the peltier coefficient P and the current rating of the device (TEC1) can also be obtained from device data table; thus the estimated time for generating water droplets from the humid air is calculated readily. As soon as the device is powered the hot side starts getting hotter and cold side cooler; reaching the dew point temperature. The cold side of TEC starts to cool the air passing through its heat sink area and water vapours start to condense just like the water condensation

happens outside a glass full of ice. It is important to keep in mind that when TEC starts it takes a longer time to actually produce water, though it reaches the dew point temperature readily, but after some time the process acquires the speed to produce sufficient water according to the experiment result of this project.

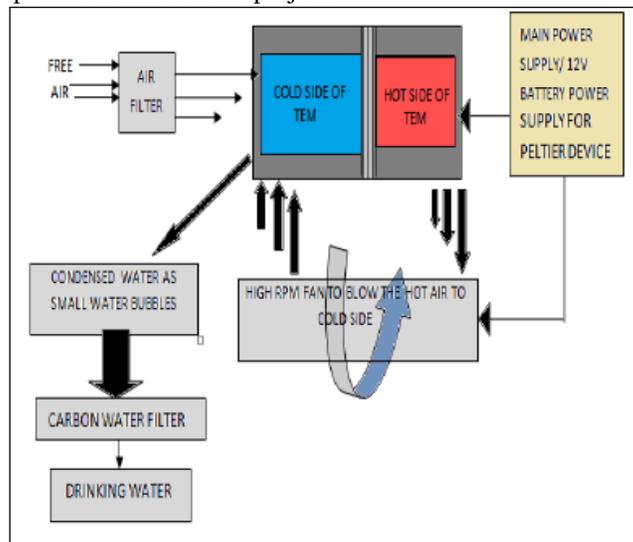


Fig. 3

TEC1 is a device that is used for average efficiency requirement according to the power is fed and time taking to reach its optimum level of cooling effect. As this project mainly lies on the uses of solar energy, it is immediately not possible to use higher TEC as those will require higher voltage rating. So comparatively it's fruitful to use TEC1 though it takes a bit longer time to run efficiently.

VII. EQUIPMENTS AND RESULT

The solar cell unit is to be installed in this system, rated as output of 12 V with the maximum output power of 120 W, evidently which is able to supply enough power to keep running two 40 W (3.5 A) Peltier coolers (TEC1) connected in parallel. The Peltier device has a dimension of 4x4x0.8 cm. The maximum temperature difference i.e. ΔT of 87°C. A 3000rpm, 15x15cm (size of TEC1) fan that is capable of producing airflow of 2.54 metre cube per second at most is used for circulation of the air. The heat sinks are made of aluminium and are anodized.

VIII. EXPLANATION

Air capacity of holding water-vapour varies according to the temperature of the air and humidity. The warmer the air, the more water-vapour it can hold. The moisture air is pumped first into the tube thus the cold side of the Peltier element helps to decrease the air temperature.

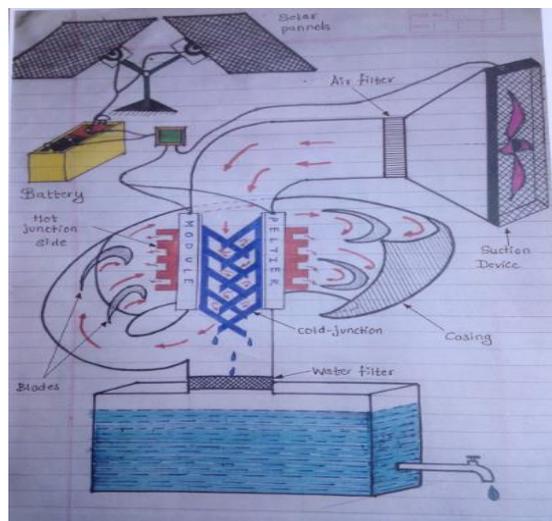


Fig. 4:

So, as the air cools down, its capacity of holding water decreases and water moisture starts condensing. The air is then passed through to the hotter side of TEC that cools the temperature of hot side, as shown in above diagram. This is necessary to keep running of peltier device; otherwise the temperature will increase at hot side so much that the device could be damaged. This warm air can be sent to the cooler side to increase the water generation, as described earlier. The condensed water falls into a reservoir then passes through a filter (optional).

When testing an assembly of this type it is important to monitor temperature and relative humidity. Measuring the temperature and the humidity of the cooling inlet and outlet air as well as flow rates is necessary to build a closed loop control unit. It is built using TC1046 Sensor and a PIC16F872 or ATmega series microcontroller to control the system and keeping the temperature of the circulating air above the water freezing point. It senses the temperature of two sides of TEC1 by using two temperature sensors and accordingly follows an algorithm to control the fan's speed as well as system safety. According to the output, and a bit estimation it is observed that, this system can produced almost 1 Litre of condensed water per hour during the day light, when it is running at its optimum working condition.

IX. APPLICATION

There are hardly any chances to refuse that this device is portable for its simple design and endurance capability. So, the Atmospheric Water Generator is the device which can be implemented for extreme situation, to use during flood, in desert areas, and in rural areas. It has great advantages as it works like a renewable source of atmosphere water and doesn't need a heavy power source. Many company like 'Watermaker India ltd', 'Aerowater', etc have already this type of device for domestic purpose. It can be implemented for Industrial development where the water is a matter of crisis.

X. CONCLUSION AND FUTURE WORK

Applying this system in a highly humid region almost 1 Litre of condensed water can be produced per hour during the day light, this is a promising result; then a more enhanced system can be designed that encounters higher power solar cells and also has the adroitness to store the excess energy during the day light that is to be used at night; indeed the economic advantage of this kind of system is a bit obscure due to the relatively high installation cost.

This idea can be extended further in future –

- 1) For large scale implementation, RO and UV water filter can be used.
- 2) Peltier device has many types of models which are much efficient than TEC1. Those can be used.
- 3) As the project aims at producing water from atmosphere and keeping this device handy, large sized scrubbers are not used for better air filtration. Scrubbers can remove all the oxides from the air. For large implementation it can be handled.
- 4) The concept of this project can also be used as a better alternative in refrigeration science against conventional systems.

It can also be observed in this way i.e. the usage of such low power semiconductor devices are indicating towards more prominent evolution of cooling engineering that is going to alter the whole scenario and myths about the power consumption of refrigeration science. Thus in near future we will be able to use such devices that are now limited within the project works.

REFERENCES

- [1] Comprehensive Optimization for Thermoelectric Refrigeration Devices by Robert A. Taylor
- [2] International Engineering Research Journal (IERJ) performance Evaluation of Solar Powered Peltier Condenser to Extract Water from Ambient Air Kiran Pawar, V. S. Shinde. Department of Mechanical Engineering, Savitribai Phule, Pune University, Maharashtra.
- [3] Scholars Research Library Archives of Applied Science Research, 2012, 4 (1):497-507 Impending water crisis in India and comparing clean water standards among developing and developed nations, Prashant Mehta, Centre for Waste Recycling & Remediation Technologies National Law University, Jodhpur
- [4] National Level Conference on Water Management Scenario 2025 Problems, Issues and Challenges. WATER SCENARIO 2025, Prof. P.G. Shinde, Head, Department of Geography, Ex-Vice Principal, V.P.M.'s Joshi-Bedekar College, Thane. Chairman, Board of Studies of Geography, University of Mumbai.
- [5] The Most Frequently Asked Questions About Thermoelectric Cooling from ©2006, Tellurex Corporation 1462 International Drive Traverse City, Michigan 49684 231-947-0110 • www.tellurex.com.